



### Accessories with RFID transponder

#### HEXTAG – High Frequency (HF)

The HEXTAG made from PA66 is equipped with a transponder of HF frequency. The central hole allows a simple mounting in applications where a RFID cable tie solution is not suitable. All HUB Auto ID RFID products can be used for securing, serialisation, tracking and identification of products in the areas of resource management, electrical inspection, inventory, distribution and rental services as well as for easy management of maintenance and repair routines.


#### Features and benefits

- Can be fitted using a chosen fixing element through the centre hole
- Flexible, contactless data communication
- Clear identification of objects through unique numbering
- Faster data management compared to paper solution
- More accurate documentation processes – prevention of human errors
- Robust and resistant to harsh environments and cleaning processes
- High frequency (HF – 13.56 MHz)
- Rewritable
- Yellow colour for easy visual detection



RFID HEXTAG – for applications where a RFID cable tie solution is not suitable.

<b>MATERIAL</b>	Polyamide 6.6 (PA66)
<b>Frequency</b>	13.56 MHz (HF)
<b>Idle Temperature</b>	-40 °C to +85 °C
<b>Operating Temperature</b>	-40 °C to +85 °C
<b>Flammability</b>	UL 94 V2

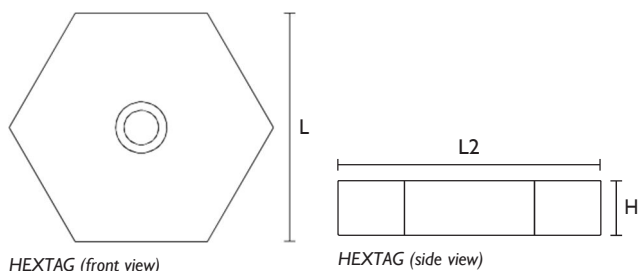

TYPE	Frequency	Height (H)	Length (L)	Length (L2)	Colour	Pack Cont.	Tools	Article-No.
RFID HEXTAG	13.56 MHz (HF)	8.0	33.4	38.39	Yellow (YE)	100 pcs.	52-53	151-01582

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.

Recommended Tools		
	52	53
	RFID-DT22-HF	RFID-HS9BT-HF
	515	514

For more information on toolings please refer to the Application Tooling chapter.



For product specific approvals and specifications please refer to the Appendix.